



Installation Instructions

Spindle Mount Kit

Item # FC2006SMX

Applications: 1965-72 Chrysler, Dodge and Plymouth C-body cars



Thank you for choosing Leed Brakes for your automotive product needs. Before you begin your installation please inspect all parts and review the installation instructions. If you have any missing or damaged parts or if you have any questions regarding the fitment of this kit on your specific vehicle please contact our customer service team at (716) 852-2139 before beginning your installation

Tools required for a safe and smooth installation:

Proper Jack & Jack Stands, Tube Wrenches, Standard Socket Set, Standard Wrench Set, Torque Wrench, Lug Wrench, Pliers, Mallet, Brake Fluid, Brake Cleaner, Wheel Bearing Grease.

Drum Brake Removal:

1. Safely raise the vehicle off the ground until the wheels are clear and spin freely. Support the vehicle using the appropriate Jack Stands and remove the front wheels.
2. Starting at the front wheel hub, remove the grease cap, cotter pin, lock nut and flat washer from the spindle as well as the outer bearing.
3. You should now be able to slide the hub/drum assembly off the spindle. If you have trouble removing this assembly, you may need to retract the brake shoes by inserting a flathead screwdriver into the adjustment slot in the drum brake backing plate. Use the screwdriver to disengage the adjusting lever from the adjusting screw. You should now be able to turn the adjusting screw to retract the brake shoes.
4. Before you remove the drum brake backing plate you will want to remove all brake fluid from your brake system. ***Be very careful not to spill any brake fluid on any painted surfaces as it will damage your paint.*** To remove the brake fluid from your system first remove the lid from your master cylinder. Next place one end of a clear hose on the bleeder of your wheel cylinder and the other into a suitable container. Finally open the bleeder screw until all fluid has been removed from your system.
5. From under the dash disconnect the pushrod from the pedal assembly.
6. Disconnect the brake line(s) from your master cylinder. Remove the retaining hardware and remove the master cylinder and or power booster from the firewall. This assembly will also include the pushrod that was previously disconnected from the pedal.
7. Disconnect the hard brake line from your flexible hose at the frame rail. It is recommended you use a tube wrench so as not to damage the brake line fittings. If your fittings look rusty spray them with penetrating oil and let them soak for easy removal.
8. Remove the horseshoe clip from the brake hose at the frame mount.
9. Remove the drum brake backing plate assembly by removing the 4 retaining bolts and nuts attaching it to your spindle. Again, the use of penetrating oil is recommended on any rusty hardware for easy removal.

Inspection:

Once you have removed all drum brake components from your spindles it is recommended that you clean your spindles bearing surfaces. Check for any debris or signs of damage to the spindle. Any light damage caused by rust can usually be cleaned up with an emery cloth.

At this point you should also test install your new bearings onto the spindle to ensure proper fitment without interference.

Brake Kit Installation:

1. The calipers will be installed on the front side of the spindle. Install **Caliper mounting brackets** so that the caliper mounting holes are orientated towards the front of the car. **Photo 1 & 2**
2. The caliper mounting bracket will be installed on the outside face of the factory spindle. Use the 7/16" bolts and lock washers to secure the upper holes and use the 5/8" nut, bolt, and lock washer to secure the lower front hole. The factory hardware should be reinstalled in the lower rear hole. Torque the 7/16" bolts to 45-50 ft. lbs. and torque the 5/8" bolts to 125 ft. lbs.
3. Slide the supplied spacer onto the spindle prior to installing the rotor. This will ensure the rotor sits in the proper position on the spindle. The beveled face will point in. **Photo 3 & 4**
4. Next you will need to properly pack the **inner and outer bearings** with grease prior to installation.
5. Install the greased **inner bearing** into the inner race of the **rotor**. **Photo 5**
6. Lightly pack grease into the inner lip of the **grease seal**. Next install the **grease seal** into the inner portion of the **rotor** using a soft mallet or piece of wood. This will prevent any damage from occurring during installation. * **The lip of the seal should face the bearing when installed. Photo 6**
7. Slide the **rotor** onto the **spindle** and install the greased **outer bearing, slotted washer** and **adjusting nut**. **Photo 7 & 8**
 - a. **Proper adjustment of the bearings is VERY IMPORTANT.** Rotate the rotor while tightening the spindle nut to 18-24 ft lbs. Next back off the adjustment nut about 1/2 turn and retighten to 10-15 ft lbs. while aligning the retaining slots with the cotter pin hole in the spindle.
 - b. Install **cotter pin**, bend cotter pin so that each side is bent in the opposite direction of the other.
 - c. Install the **grease cap**.
 - d. Spin the rotor to ensure there is no interference with the grease cap and retaining assembly.
8. **Calipers** will arrive preloaded and ready for installation. If you need to replace the pads in the future the retaining pins are held in by spring clips. The pins can be removed by driving them out with a punch from the outside face of the caliper. The pads are standard **D11** brake pads. **Photo 9**
9. Install the **calipers** with the bleeder facing up. Use the **7/16-20 x 2" bolts** and lock washers provided. Place one of the supplied flat washers between the caliper mounting boss and the caliper mounting bracket at each hole. Torque to 45-60 ft. lbs. **Photo 10 & 11**
10. Once the calipers are installed spin the rotors to ensure there is no interference between the caliper and the rotor. If the caliper is not centered over the rotor you may need to add additional shim washers. These should be placed between the caliper mounting bracket and the flat washer at each mounting hole. This will move the caliper inboard towards the engine. If the caliper needs to move outboard towards the wheel remove the supplied flat washers. **Photo 12**
11. Before installing the **flex hose** adapter into the caliper wrap the threads on the flat end of the adapter with Teflon pipe thread tape. **Note the pointed end of the fitting will connect to the flex hose and the flat end will go into the caliper. Do not use Teflon tape on the pointed end.** This is a pipe thread fitting that will become tighter as it is threaded into the caliper. It will be necessary to angle the adapter correctly to allow for the best flex hose routing. **Photo 13 & 14**

12. Install the female flex hose adapter to the frame bracket and retain it using the **horseshoe clip** provided. Reconnect the original hard line and tighten using a tube wrench. Next connect the flex hose between the adapters and tighten using a tube wrench.

13. Turn the wheels through a complete left and right turn to insure there is no interference with the new brake system and any suspension or body components. Also check the hoses during this operation to ensure the hoses are not binding or twisting. If your rubber hoses bind during a turn, you could experience loss of braking while driving. If it looks like they are binding remove the horseshoe clip and reposition the brake hose until it no longer binds.

Install your wheels and spin them to insure they still spin freely making sure the caliper doesn't interfere with the wheel and your brakes are not dragging or locked up.

That completes the installation of your brake kit at the spindles. If you purchased a kit containing power or manual actuation, please refer to the separate instructions provided with those components.

If you have any questions please call our tech line at (716) 852-2139

Thank you for purchasing from LEED Brakes we hope you have had an enjoyable experience.



Installation Photos

Disc Brake Conversion Kit

Applications: 1965-72 Chrysler, Dodge and Plymouth C-body cars



Front of Car →

Photo 1



Photo 2



Photo 3



Photo 4



Photo 5



Photo 6

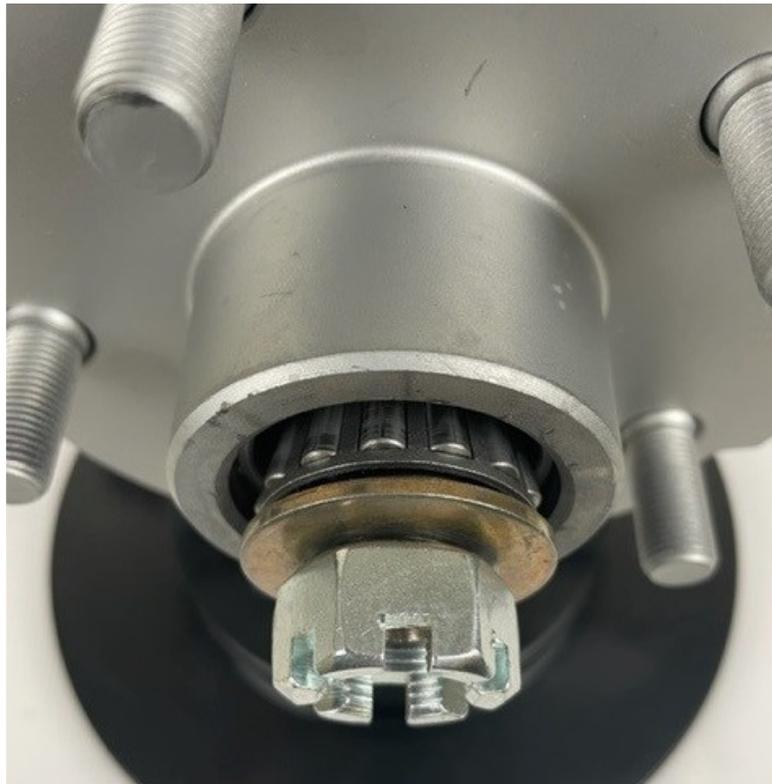


Photo 7



Photo 8



Photo 9



Front of Car →

Photo 10



← Front of car

Photo 11



Photo 12



Photo 13



Photo 14